




PR2 HOLLOW DRILL BITS RAIL DRILL

Ergonomy and performance in one rail drill

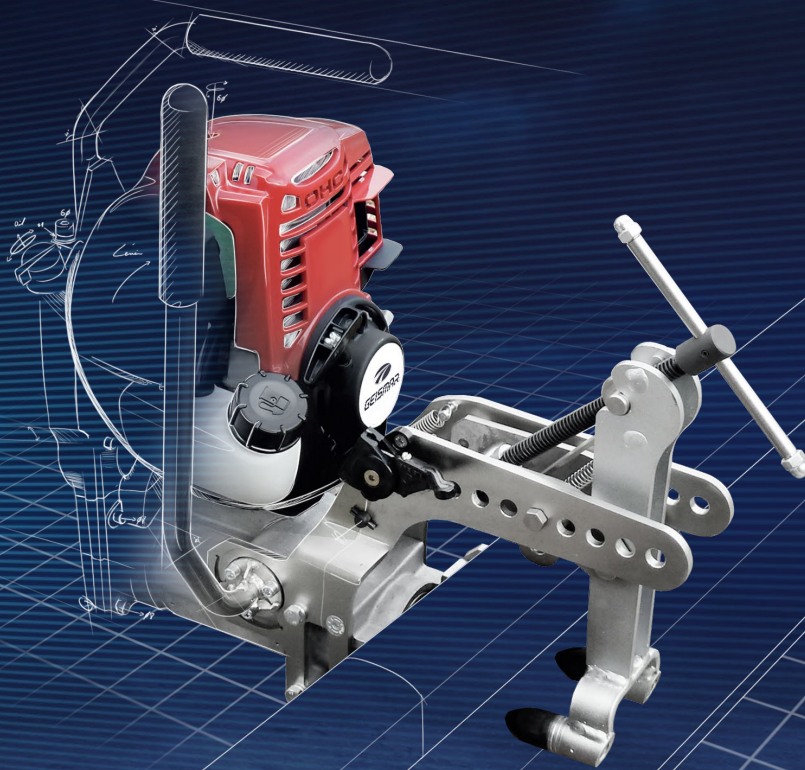

Lightweight and easy to use

Limited operating time

Reliability and long lifespan



Your benefits

- Fast drilling by using hollow drill bits
- Light machine, easy to use and install using a quick fixation vice (adaptable on both grooved rails and flat bottom rails)
- The engine benefits from Honda warranty
- Easy commissioning thanks to the 4 stroke engine (no fuel mix preparation)



Easy fixation using a quick locking vice

Consumables and accessories

- Hollow drill bits *
- Twist drill bits *
- Drilling templates *
- Transport casing
- Accessory for drilling over elastic fastening
- Adaptation nozzle for twist drill bits

* (different dimension available)



Hollow drill bit

*Nozzle for
twist drill bit*

Standard kit contains

- Drill
- Pressure tank for drilling liquid
- Tools suitcase for drill bits and templates

Specifications

Engine	Honda GX35
Engine Power	1 kW (1.3 hp)
Mass	43.65 lbs (19.8 kg)
Dimensions (L x W x H)	19 x 11 x 19 in. (490 x 280 x 490 mm)
Drilling depth	3 in. (85 mm)
Maximal drilling diameter	1.6 in. (40 mm)
Spindle speed	320 rpm
Spindle type	Weldon
Maximal rail hardness	270 HB



Transport casing